


FSM1005LFS 系列霍尔电流传感器


基于闭环磁平衡原理的一款霍尔电流传感器,能够测量直流,交流,脉冲以及各种不规则电流。该款传感器是电流输出模式的,可以根据客户的需求外接电阻转换为电压信号。





| | F: | SM1005LFS | | |
|---|---|---------------|---------------|--|
| 电参数/Electrical characteristics | | | | |
| 额定电流IPN(A) | | 100 | | |
| Rated current | | 1000A | | |
| 测量范围IP(A) | | 0-±1500A | | |
| Measuring range | | 0-T 1900V | | |
| | ±15V | @2000Amax 5.0 | @2000Amax5.0 | |
| 测量电阻RM(Ω) | | 005001 | 005004 | |
| Measuring resistance | | @2500Amax 1.0 | @2500Amax 2.0 | |
| | ±24V | @2000Amax 25 | @2000Amax 25 | |
| | | @3800Amax1.0 | @4000Amax 5.0 | |
| 线匝比 | 1.5000 | | | |
| Turn ratio | 1:5000 | | | |
| 额定输出电流ISN(mA) | 200 + 0 20 | | | |
| Rated output current | 200±0.2% | | | |
| 次级线圈内阻(Ω) | 40 Ω | | | |
| Internal resistance of secondary coil | 40 \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ | | | |
| 电源电压Vc(±5%) | ±15V-±24V | | | |
| Supply voltage | <u> </u> | | | |
| 隔离电压 | 50Hz, 1min, 3. 8kV | | | |
| Isolation voltage | OVIE, Intil, O. OK. | | | |
| 电流损耗Ic(mA) | 28+Is | | | |
| Current loss | Z0 ⁺ 1S | | | |
| 精度XG @IPN,T=25℃ | ±0.2% | | | |
| Precision | _ ·· - ·· | | | |
| 零点失调电流lo @IP=0,T=25℃ | ≤±0.2mA | | | |
| Zero offset current 零点电流温漂 | | | | |
| | ≤±0.5mA | | | |
| Zero current temperature drift 线性度 & & & & & & & & & & & & & & & & & & & | | | | |
| 线性度 ar Linearity | <0.1%FS | | | |
| di/dt跟随精度 | | | | |
| di/dt Following accuracy | >100A/ μ s | | | |
| 响应时间 tr | | | | |
| Response time | ⟨1 µ s | | | |
| 带宽(-3db) | | | | |
| Bandwidth | DC~150kHz | | | |
| 工作温度 | | | | |
| Operating temperature | -40∼+85°C | | | |
| 储存温度 | -40∼+125°C | | | |
| Storage temperature | -40° ~⊤120 C | | | |

外形尺寸(mm)/Dimensions of drawing(mm)

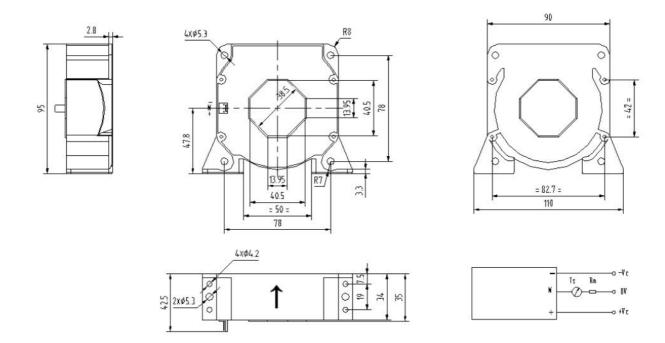

主要公差/Main tolerances:

● 总公差/Total common error: ±0.5mm

● 安装/Install: 垂直位置/Vertical position 4 holes Φ4.2mm 和2 holes Φ5.3mm

水平位置/Horizontal position 4 holes Φ5.3mm

● 初级孔径/Primary aperture: 40.5mm*38.5mm

使用方法:

1. 在IP 按箭头方向流动时, IS是正向;

IS is positive when IP flows in the arrow direction.

2. 初级导体温度不应超过100℃;

Primary conductor temperature should not exceed 100°C;

3. 母排完全充满初级穿孔时动态表现 (di/dt和响应时间)为最佳;

The dynamic performance (di/dt and response time) is the best when the busbar is fully filled with primary perforations;

4. 为了达到最佳的磁耦合,初级线匝应绕在传感器顶部;

In order to achieve the best magnetic coupling, the primary turns should be wound around the top of the sensor;

5. 可以根据客户的要求来定制产品。

Products can be customized according to customer requirements.